

DIM Series




TRIAC Dimming LED Driver

可控硅调光LED驱动器

Features:

- Dimmable with leading edge or trailing edge dimmer
- Constant voltage driver
- Independent compact design
- Protections: opencircuit, shortcircuit, overload, overtemperature
- SELV equivalent
- Protection class II
- Smooth dimming compatible with most dimmer
- Dimming range 1...100%

- 适用普通可控硅前切相或后切相调光器
- 恒压驱动
- 超小体积，独立式紧凑型设计
- 输出开路，短路，过载和超温保护
- 符合安全特低电压标准
- 保护等级 II
- 平滑高性能调光，匹配更多的调光器
- 调光范围 1...100%光通量

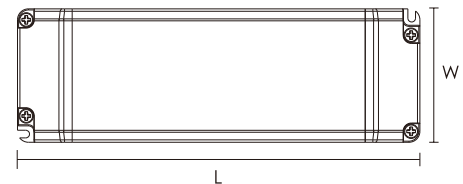

Parameters:

Model No. 型号	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output current 输出电流 (A)	Output voltage 输出电压 (V)	Power factor 功率因数 (λ)	Efficiency full load 效率 (%)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
DIM12-50	220-240	50	1.0-4.16	12	0.95	84	-20...+50	70	SELV	184x61x32	240
DIM24-50	220-240	50	0.5-2.08	24	0.95	86	-20...+50	70	SELV	184x61x32	240
DIM12-100	220-240	100	2.7-8.3	12	0.95	89	-20...+45	80	SELV	210x67x34	360
DIM24-100	220-240	100	1.4-4.2	24	0.95	91	-20...+45	80	SELV	210x67x34	360